



## City Research Online

### City, University of London Institutional Repository

---

**Citation:** Fabian, M., Hind, D., Gerada, C., Sun, T. & Grattan, K. T. V. (2018).

Comprehensive monitoring of electrical machine parameters using an integrated fibre Bragg grating-based sensor system. *Journal of Lightwave Technology*, 36(4), pp. 1046-1051. doi: 10.1109/JLT.2017.2771143

This is the accepted version of the paper.

This version of the publication may differ from the final published version.

---

**Permanent repository link:** <https://openaccess.city.ac.uk/id/eprint/18577/>

**Link to published version:** <https://doi.org/10.1109/JLT.2017.2771143>

**Copyright:** City Research Online aims to make research outputs of City, University of London available to a wider audience. Copyright and Moral Rights remain with the author(s) and/or copyright holders. URLs from City Research Online may be freely distributed and linked to.

**Reuse:** Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.



# Comprehensive monitoring of electrical machine parameters using an integrated fibre Bragg grating-based sensor system

M. Fabian, D. Hind, C. Gerada, T. Sun, and K.T.V. Grattan

**Abstract**—In this paper a multi-parameter, multi-sensor system for comprehensive electrical machine condition monitoring has been developed and the results of an evaluation reported. The FBG-based system developed allows for the simultaneous monitoring of key parameters including machine vibration, rotor speed, torque, spin direction, temperature distribution along the stator windings and on the rotor surface as well as the stator wave frequency. This all-optical sensing solution has been designed to be compatible with being fitted in the tight confines of an electric motor and uses the optical nature of the measurement and the insulating nature of the sensor material to avoid problems of electrical interference. The system reduces the component count over conventional sensor systems, i.e., all sensing elements are contained within the machine and operated by a single sensing interrogation unit, thereby reducing cost and allowing for a convenient interface for the user. The design of the system is presented, as are results on the testing and evaluation of the device the sensing system has been successfully integrated into and tested on a permanent magnet motor prototype.

**Index Terms**—Fibre Bragg gratings, multi-parameter monitoring, temperature profiling, torque, rotor speed, vibration

## I. INTRODUCTION

THE proliferation of the ‘more electric’ concept in many areas of engineering is bringing about an increase in demand on greater reliability, increased power density and higher manufacturing efficiency of rotating electrical

machines. To address this ever-growing demand for new and more reliable designs, electrical machines are increasingly required to be monitored in real-time with the data obtained being used for both model validation and prototype diagnostics. The latter helps to identify potential modes of failure and thus ensures the drive’s reliability, as required by owners of the equipment or the end users. If a conventional approach were to be adopted to achieve such multipoint, multi-parameter measurements, it would involve a drastic increase of component count, thus reducing the overall reliability of the system in question. To do this effectively requires the use of sensors, indeed sensor systems, well suited to the demanding environment of the electrical machines in which they are to be placed. Conventional sensors are problematic in such environments, due to the limitations of space and the need to feed cables out from a rotating machine, as well as difficulties that may occur due to electromagnetic interference and short circuits. Further to this, due to the relatively large size of insulated conventional sensors, the resulting sensor system created from the use of a number of such sensors could potentially occupy a spatial envelope larger than the drive itself. New and better tailored solutions are needed and this work thus aims to address the above challenges by replacing such conventional sensors with an integrated optical fibre-based, quasi-distributed, sensing system in electrical machines for real-time monitoring. Such an approach takes full advantage of the fibre sensors’ reduced spatial envelope and immunity to electromagnetic interference, critically important for this particular application.

One of the first efforts made in the direction of introducing an optical fibre sensor development for motor and drive applications was to exploit Rayleigh backscattering in conjunction with a fibre having its outer cladding modified at intervals to create a quasi-distributed temperature measurement system using an optical time domain reflectometry (OTDR) approach [1]. Since then different optical sensing techniques have been applied to monitoring a number of key motor parameters: end-winding vibratory behaviour [2], stator housing vibration [3], thermal effects [4–7] and torque [8,9], for instance. In a previous report, the authors introduced a successful stator wave and rotor speed tracking system based on Fibre Bragg Grating-based (FBG) sensors [10].

This work was funded by the European Union’s Clean Sky Initiative under grant 632433.

M. Fabian is with the City, University of London, EC1V 0HB, London, UK (e-mail: matthias.fabian.1@city.ac.uk).

D. Hind is with the University of Nottingham, NG7 2RG, Nottingham, UK (e-mail: david.martin.hind@gmail.com).

C. Gerada is with the University of Nottingham, NG7 2RG, Nottingham, UK (e-mail: chris.gerada@nottingham.ac.uk).

T. Sun is with the City, University of London, EC1V 0HB, London, UK (e-mail: t.sun@city.ac.uk).

K.T.V. Grattan is with the City, University of London, EC1V 0HB, London, UK (e-mail: k.t.v.grattan@city.ac.uk).

This work builds on the above and the prior work by the authors [11] with the aim to address all the above-mentioned parameters to create a multi-parameter sensor system which additionally allows for monitoring in real-time. This has been done by using an array of specifically located FBG-based sensor devices, responding to a single sensing interrogation unit: in that way simply and cost-effectively eliminating the need for individual sensor systems for each parameter and therefore significantly reducing the complexity of electrical machine condition monitoring, with no compromise on functionality. The ‘all-in-one’ sensor system thus designed and developed was tested in an important ‘real world’ application: on a permanent magnet-based alternating current (PMAC) machine prototype where the rotor’s rare earth magnet temperatures are of particular interest as overheating causes demagnetization and therefore machine failure. In that way, the multi-parameter outputs from the incorporated sensor system can be used for effective performance monitoring and signalling of incipient failure. A key feature of the system is that it can be used while the motor is in operation due to the optical nature of the sensor ‘read out’, in a way that does not interfere with the operation of the motor.

The principles of operation and the design of the sensor layout is discussed next, followed by the results of a series of tests carried out, after which conclusions on performance and capability are drawn.

## II. PRINCIPLE OF OPERATION AND SENSOR LAYOUT

In this investigation, FBG-based sensors were designed and used to measure the different above-mentioned parameters which are of critical importance to the performance of the electrical machine. To do so an FBG-based approach is used for all the parameters monitored; here the FBG formed within a fibre behaves like a ‘notch filter’ (in transmission), which reflects light at a wavelength (termed the Bragg wavelength) that satisfies the so-called Bragg condition whose effects on temperature and strain have been widely reported [12] and are exploited in this research. The FBGs used in this study were manufactured ‘in-house’ using the phase mask technique. Photosensitive fibre (Fibercore SM1500) was chosen and it was illuminated using an ATLEX 300-SI laser at 248 nm, after which the gratings were annealed at 180°C for approximately four hours to stabilize their performance. The reflectivity of the FBGs is ~25%, with a full-width half-maximum of ~300pm.

In order to evaluate the ‘all-in-one’ sensing concept which forms the basis of the sensor system, a PMAC machine was instrumented with a total of 48 FBGs, which formed different sensors which were placed at known, specific locations within the motor to allow key parameters at those locations to be monitored.

In the multi-parameter approach used, the principle exploited to measure vibrations, the rotor speed and, the stator wave frequency and the spinning direction were based on the spatial modulation of the air-gap flux in the stator core of the electrical machine [10]. The resulting stator tooth displacement could be measured in the form of strain by placing an FBG between adjacent stator teeth, as is schematically depicted in Fig. 1(a). In this investigation 12

FBGs were circumferentially mounted between every stator tooth pair (Fig. 1(b)). Since the machine is fully enclosed, the FBGs do not require any further packaging or protection, and were left bare. The signals received at the sensor interrogation system from any two of those FBGs can be used to determine the rotor’s spinning direction, as will be discussed in Section III. The stator bore was instrumented with twelve sensors for redundancy reasons to allow for any problems that may occur with the measurement using any particular pair of sensors, given the ease with which FBG-based sensors can be written in the optical fibre used.

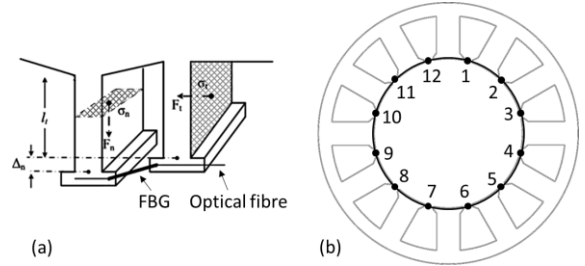


Fig. 1. (a) Schematic illustration of an FBG positioned between two stator teeth in an electrical machine used to detect tooth displacement. (b) Locations of the 12 circumferentially mounted FBGs used to measure stator vibrations and teeth elongations.

The stator windings were then instrumented with 24 FBG-based sensors to monitor the temperature distribution of the windings. The FBGs were distributed along the stator slots (two per slot) using two fibres, installed so that each meandered between every other stator slot, as is shown schematically in Fig. 2. Taking a view from the non-drive end (NDE) of the machine (as seen from Fig. 2(a)), the fibres were routed from the start point (S) toward the drive end (DE), looped around (broken line) skipping on stator slot to avoid very small bending radii, routed back to the non-drive end, looped around (solid line) and so on. The crosses and circles indicate the routing direction, i.e., a cross means ‘away from the NDE’ and a circle means ‘toward the NDE’. The sensor locations are highlighted by white arrows in Fig. 2(b).

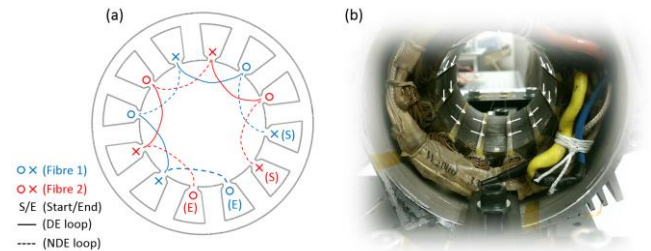


Fig. 2. (a) Fibre routing along the stator slots as seen from the machine’s non-drive end (NDE). (b) Photograph of instrumented stator with two FBGs per stator slot (white arrows) for end winding temperature monitoring.

The method employed to measure torque was based on a differential wavelength approach where two FBGs were attached to the rotor shaft at an angle of  $\pm 45^\circ$  with respect to the spinning axis [8,9]. In this configuration, the difference between the two FBG reflection peak wavelengths was used as a measure for torque, whereas the measurement at their mid-

point was an indicator for the temperature at that location (Fig. 3).

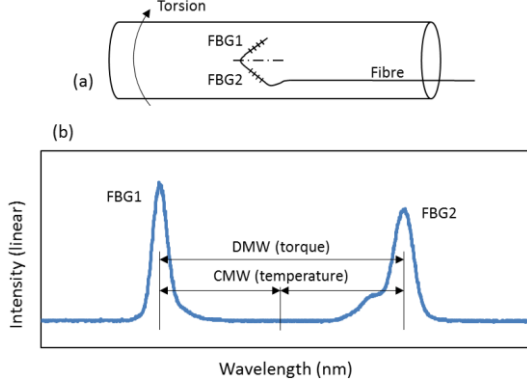


Fig. 3. (a) Torque measurement principle, i.e., two FBGs mounted on the rotor shaft surface at an angle of  $\pm 45^\circ$  with respect to the shaft axis. (b) Exemplary reflection peaks of the two FBGs in (a). The differential mode wavelength (DMW, midpoint) relates to torque whereas the common mode wavelength (CMW, mid-point) changes with temperature.

The rotor was then instrumented with 12 FBGs on one fibre (Fig. 4), two of which are used to measure torque (as highlighted above) and the other ten to measure the magnet temperatures (using one FBG per magnet). The rotor sensors were interrogated through the use of a fibre-optic rotary joint (Princetel MJX series) attached to the non-drive end of the motor (Fig. 5) which allows for continuous conditioning monitoring while the rotor is spinning. This aspect is particularly valuable.

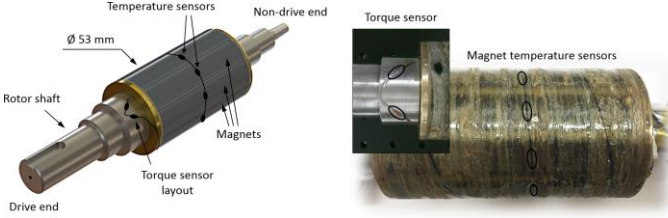


Fig. 4. Rotor layout. Twelve FBGs on one fibre were used to measure torque and the magnet temperatures.

All the FBGs used were fixed bare onto the respective surfaces using a two-component, high-temperature impregnation resin (Elantas Epoxylite® 235SG). This was done as the fibre would be protected when installed within the motor housing.

### III. RESULTS AND DISCUSSION

The fully instrumented PMAC motor, with the sensors configured as discussed above, is shown in Fig. 5. All the sensors are confined *within the machine* with the only external component required being the rotary joint to allow the sensor system readout. The motor was subsequently evaluated on a full-scale test bench (Fig. 6) to assess the performance of the instrumented system.

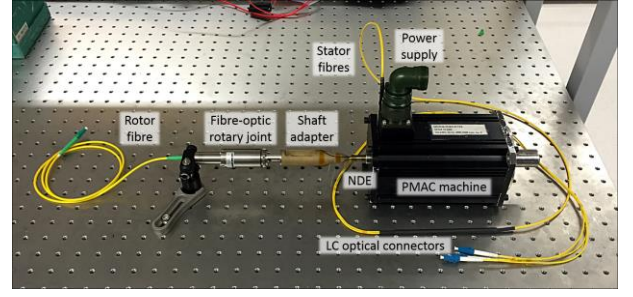


Fig. 5. Instrumented 2 kW, 2000 rpm PMAC machine showing the key components of the system.

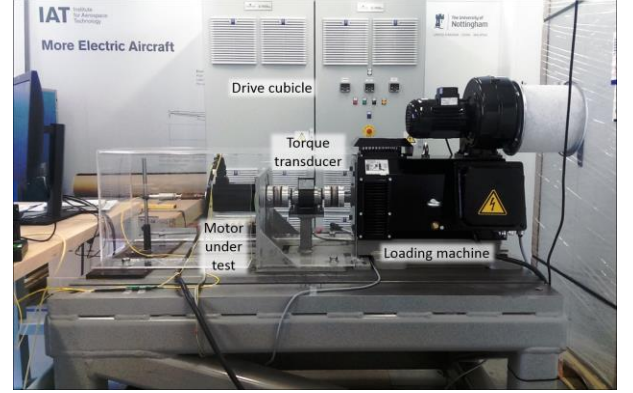


Fig. 6. Full-scale motor test bench installed at the Aerospace Technology Centre, University of Nottingham, UK.

An important feature of the sensor system is that the dynamic Bragg wavelength shifts of *all 48* FBGs were captured simultaneously using a Micron Optics SM130 sensing interrogator unit, at a high sampling rate, suited to the rotation conditions of the motor, of 2000 Hz. The DC components of the transient signals were used for thermal analysis (and torque) monitoring, whereas the AC components were used to determine the dynamic parameters, i.e., rotor speed, vibration, and spinning direction. In that way data on multiple parameters could be obtained simultaneously.

Fig. 7 shows the frequency response of one of the circumferentially mounted FBG-based sensors with the machine spinning at 16.7 Hz, under no load. For the chosen FFT window length of one second, the frequency resolution is one hertz. The first spectral feature recorded at 16.7 Hz represents the rotor speed (the mechanical frequency) and the main feature at 167 Hz corresponds to the stator wave frequency (the electrical frequency). Either of the two can be used to extract the rotor speed and convert it to the industry-standard rotations per minute (rpm). Other vibrational information, as evident from Fig. 7, gives machine developers and engineers important insights into the vibratory behaviour of a machine's design, when driven at different loads. Since vibrations are also an early indicator for impending machine failure, the constant monitoring of vibrations is of significant importance for environments where increased reliability is required.



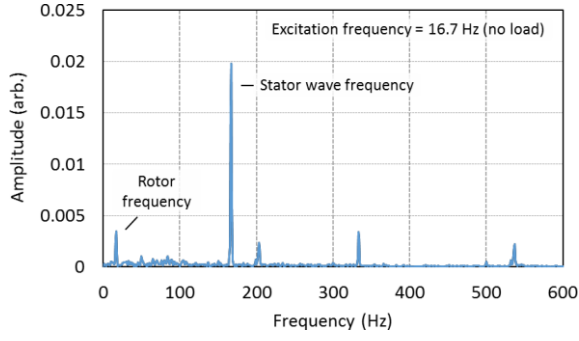


Fig. 7. Frequency response of one of the circumferentially mounted FBGs in the case of a spinning rotor under no load.

Fig. 8 shows the rotor speed information obtained from the FBG sensor data, monitored against an externally mounted reference sensor (Magtrol TMHS 311/111) – here the rotor speed was varied between 0 rpm and approximately 550 rpm. It is clear from Fig. 8 that the information obtained from the use of the FBG approach very closely matches the reference sensor signal – but at a much-improved signal-to-noise ratio. Thus, through this system effective data on this key parameter can be obtained using a sensor system integrated into the motor itself.

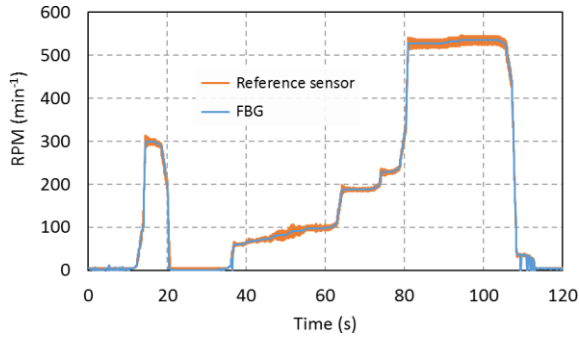


Fig. 8. Rotor speed transients vs time obtained from the FBG sensor and from a reference sensor.

Fig. 9 shows the dynamic responses of three of the circumferentially mounted FBG-based sensors, highlighting the phase shift between them for both the positive and the negative spinning direction. It is clear from Fig. 9 that the phase shifts in the two plots are reversed, as would be expected. The phase shift between any two of those FBGs then can be used to determine the spinning direction of the rotor, a positive phase shift indicating rotation in one direction and a negative phase shift rotation in the other direction.

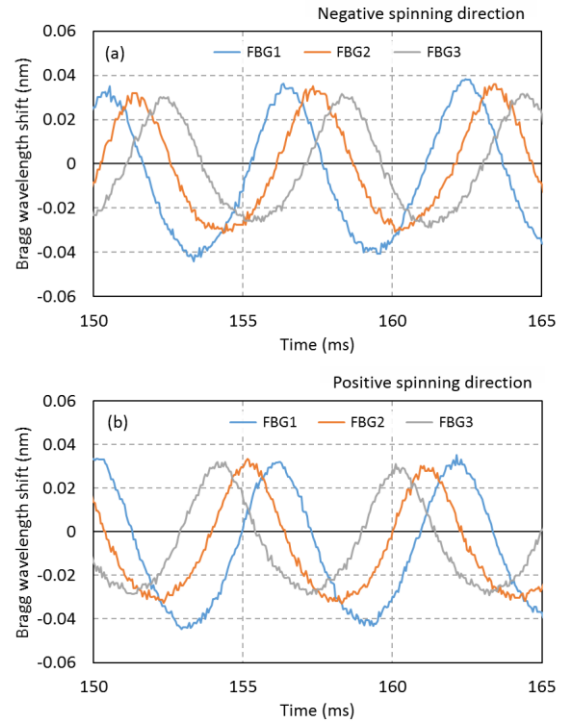


Fig. 9. Examples of phase shifts of three of the circumferentially mounted FBGs for both the negative (a) and the positive (b) spinning direction.

Fig. 10 shows further data obtained from the sensor system in the torque calibration curve, i.e., differential mode wavelength (FBG peak distance) versus torque with a linear relationship between the two parameters. In practise, it is challenging to realise an angle of exactly  $90^\circ$  between the two FBGs meaning that the differential mode wavelength will experience some sort of temperature dependence. However, this is easily compensated by using the torque-independent mid-point wavelength as an indicator of the temperature.

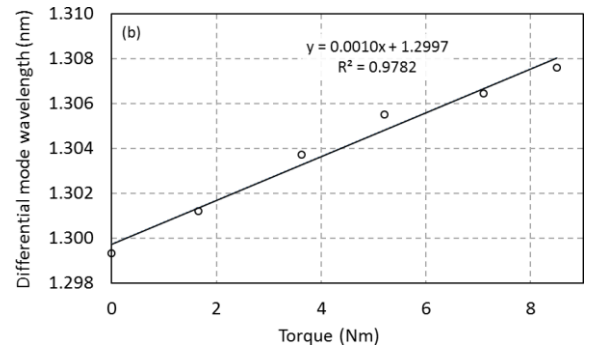


Fig. 10. Torque calibration curve of the PMAC machine under test.

The thermal profiling of the stator windings (using 24 FBGs), rotor magnets (using 10 FBGs) and rotor shaft (using 2 FBGs) is illustrated in Fig. 11. The Machine was driven at incremental loads of up to 8.5Nm for approximately 25 minutes, to generate a ‘rapid’ temperature increase, before the load was reduced to zero to monitor the cooling process. Developing a more detailed understanding of the thermal behaviour (with regard to the machine design) is beyond the

scope of this investigation, which is a feasibility study (and will be published elsewhere).

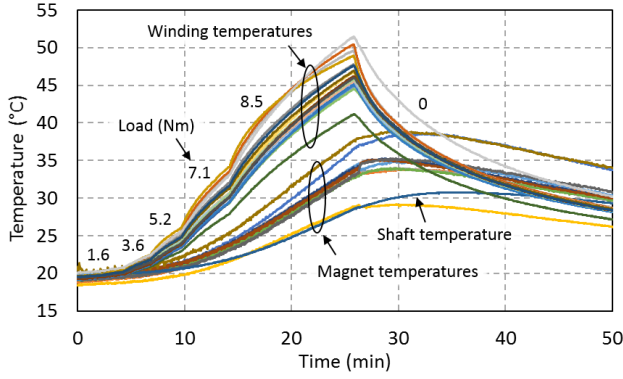


Fig. 11. Thermal profiling of the rotor (12 FBGs) and the stator windings (24 FBGs) under increased load conditions.

In order conveniently to illustrate the thermal profiling, the FBG sensor locations were mapped onto 3-D surface models of both rotor and stator (as can be seen from Fig. 12). This way, hot-spot visual identification is made possible. For the purpose of validating the mapping algorithm, the sensor data in Fig. 11 were simulated to achieve large temperature gradients across the surface which, in practise, only occurs in case of a machine fault – an important monitoring consideration.

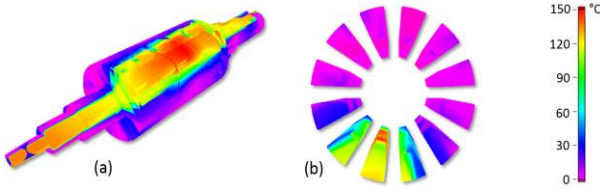


Fig. 12. Thermal profiling of the rotor (a) and the stator windings (b) by means of 3-D sensor mapping. The data in the plot is simulated to highlight possible hot-spot detection.

Taking the data from the above together, the proposed all-in-one sensor system can be seen to offer comprehensive real-time condition monitoring of electrical machines for prototype diagnostics or in safety critical environments where early fault indication is of high importance, such as on aircraft or in power stations. The increasing emphasis on electrical vehicles provides another situation where such sensor systems could be used effectively.

#### IV. CONCLUSIONS

A multi-parameter, multi-sensor system for comprehensive electrical machine condition monitoring has been developed and the results of an evaluation carried out have been reported. The FBG-based system developed has allowed for the simultaneous monitoring of key parameters including machine vibration, rotor speed, torque, spinning direction, temperature distribution along the stator windings and on the rotor surface as well as the stator wave frequency. Thus, it was shown that when placing a network of FBGs at certain locations within an electrical machine, comprehensive condition monitoring can

be performed at a high level of accuracy. Multiple parameters can be extracted from the FBG data by using appropriate data processing and compensation algorithms.

This all-optical sensing solution has been designed to be compatible with being fitted in the tight confines of an electric motor and uses the optical nature of the measurement and the insulating nature of the sensor material to avoid problems of electrical interference. The ‘all-in-one’ sensor system discussed has the potential to replace conventional systems that require a separate sensor/system for each parameter to be monitored. In this way, this single optical fibre-based design reduces the component count and spatial envelope of a test environment as all sensing elements are confined within the machine with minimum external wiring/coupling – this contrasts with the situation seen with the use of conventional sensors. Given the relatively high cost of optical sensing interrogation systems, the proposed sensor system is currently aimed at prototype diagnostics and evaluation (all presented data here are from a PMAC machine prototype), high-reliability applications where comprehensive machine monitoring is critical (e.g. electric motors on aircraft) as well as installations where the machine itself or the implicated cost of sudden failure would be vastly more expensive than the sensor system (e.g. large power generators in power plants or wind turbines).

Future work to develop this scheme further will focus on the implementation of an active feedback control system using the sensor data to control the speed of an electrical machine, operating under different load conditions for example. Given that FBG-based sensor systems can be operated effectively at significantly elevated temperatures [13,14], the system has potential to be used where higher temperatures are experienced, using an appropriate design of FBG-based optical fibre.

#### REFERENCES

- [1] A. A. Boiarski and J. P. Kurmer, "Fiber optic sensors for temperature and strain monitoring in motors and generators," Electric Power Research Institute, TR-101950-V2, 2487-02, Final Report, 1997.
- [2] P. Kung, L. Wang, and M. I. Comanici, "Stator end-winding vibration and temperature rise monitoring," in *Proc. IEEE Electric Insulation Conference*, 2011.
- [3] J. Corres, J. Bravo, F. J. Arregui, and I. R. Matias, "Unbalance and harmonics detection in induction motors using an optical fiber sensor," *IEEE Sensors Journal*, vol. 6, no. 3, pp. 605-612, 2006.
- [4] K. de Moraes Sousa, A. A. Hafner, H. J. Kalinowski, and J. C. C. Da Silva, "Determination of temperature dynamics and mechanical and stator losses relationships in a three-phase induction motor using fiber Bragg grating sensors," *IEEE Sensors Journal*, vol. 12, no. 10, pp. 3054-3061, 2012.
- [5] S. Zilberman, G. Berkovic, E. Shafir, Y. Saadi, O. Mazor, and T. Goichman, "Fibre optic sensing in rapidly rotating mechanical structures," *Rev. Sci. Instrum.*, vol. 86, pp. 115002, 2015.
- [6] A. Mohammed and S. Durović, "FBG thermal sensing features for hot spot monitoring in random wound electric machine coils," *IEEE Sensors Journal*, vol. 17, no. 10, pp. 3058-3067, 2017.
- [7] D. Kim, U. Sampath, H. Kim, and M. Song, "A fibre-optic multi-stress monitoring system for power transformer," in *Proc. of SPIE 10323*, 2017.
- [8] P. L. Swart, A. A. Chitchebakov, and A. J. van Wyk, "Dual Bragg grating sensor for concurrent torsion and temperature measurement," *Meas. Sci. Technol.*, vol. 17, no. 5, pp. 1057-1064, 2006.
- [9] Y. Wang, L. Liang, Y. Yuan, G. Xu, and F. Liu, "A two fibre bragg grating sensing system to monitor the torque of rotating shaft," *Sensors*, vol. 16, no. 1, pp. 138, 2016.

- [10] M. Fabian, J. Borg Bartolo, M. Ams, C. Gerada, T. Sun, and K. T. V. Grattan, "Vibration measurement of electrical machines using integrated fibre Bragg gratings," in *Proc. SPIE 9634*, vol. 963417, 2015.
- [11] M. Fabian, D. Hind, C. Gerada, T. Sun, and K. T. V. Grattan, "Multi-parameter monitoring of electrical machines using integrated fibre bragg gratings," in *Proc. 25<sup>th</sup> Optical Fibre Sensors Conference (OFS)*, Jeju, South Korea, 2017.
- [12] Y. J. Rao, "In-fibre Bragg grating sensors," *Meas. Sci. Technol.*, vol. 8, no. 4, pp. 355-375, 1997.
- [13] S. Pal, J. Mandal, T. Sun, and K. T. V. Grattan, "Characteristics of potential fibre Bragg grating sensor-based devices at elevated temperatures," Presented at the Technical Meeting on Advanced Sensors and Instrumentation Systems for Combustion Processes Location, London, UK, *Meas. Sci. Technol.*, Vol. 14, no. 7, pp 1131-1136, 2003.
- [14] S. Pal, T. Sun, K. T. V. Grattan, S. A. Wade, S. F. Collins, G. W. Baxter, B. Dussardier, and G. Monnom, "Non-linear temperature dependence of Bragg gratings written in different fibres, optimised for sensor applications over a wide range of temperatures," *Sensors & Actuators A – Physical*, vol. 112, no. 2-3, pp 211-219, 2004.

**M. Fabian** received the diploma degree in Electronics from Hochschule Wismar, Germany, in 2006 and the Ph.D. degree in fibre optic sensing from the University of Limerick, Rep. of Ireland, in 2012.

In 2010, he was a visiting researcher at the National Institute of Optics in Naples, Italy and in 2011 he was a Systems Engineer Intern at Intel Corporation. Since 2012 he is a post-doctoral research fellow at City, University of London, UK, working on optical fibre sensors for a variety of applications in the civil engineering, marine and power electronics sector.

**D. Hind** received the MEng degree in electrical and electronic engineering and Ph.D. degree in current derivative estimation for sensorless motor drives from The University of Nottingham, Nottingham, U.K, in 2010 and 2015 respectively. In 2015 he joined the PEMC group at the University of Nottingham, where he spent two years working as a research fellow. In April 2017 he was appointed Principal Control Engineer in the R&D Assemblies team at Dynex Semiconductor Ltd, Lincoln, UK, where he has since been working on future electric vehicle technologies. His main research interests include motor drives and sensorless control of AC machines.

**C. Gerada** received the Ph.D. degree in High Performance Electrical Machines from the University of Nottingham in 2005. After this he was appointed as a postdoctoral researcher at the university, until 2008 when he secured a Lectureship in Electrical Machines following which he was subsequently promoted to Associate Professor in 2011 and Professor in 2013. His principal research interest lies in electromagnetic energy conversion in electrical machines and drives, focusing mainly on more-electric transport and distributed energy generation.

He has secured major industrial, European and UK grants, authored more than 100 papers and has been awarded a Royal Academy of Engineering Senior Research Fellowship to consolidate research in the field. He is an associate editor of the IEEE IAS Journal and executive member of the UK Magnetic Society Management committee. He is also vice

chair of the electrical Machines Committee of the IEEE Industrial Electronics Society.

T. Sun was awarded the degrees of Bachelor of Engineering, Master of Engineering and Doctor of Engineering from the Department of Precision Instrumentation of Harbin Institute of Technology, Harbin, China in 1990, 1993 and 1998, respectively. She was awarded the degree of Doctor of Philosophy at City, University of London in applied physics in 1999 and was an Assistant Professor at Nanyang Technological University in Singapore from 2000 to 2001 before she re-joined City University in 2001 as a Lecturer. Subsequently she was promoted to a Senior Lecturer in 2003, a Reader in 2006 and a Professor in 2008 at City, University of London.

She is currently the Director of the Research Centre of Sensors and Instrumentation and is leading a research team focused on developing a range of optical fibre sensors for a variety of industrial applications, including structural condition monitoring, early fire detection, homeland security, process monitoring, food quality and environmental monitoring. She has been working closely with partners across disciplines from academia and industry, both in the UK and overseas.

Prof. Sun is a member of the Institute of Physics and a Fellow of the Institution of Engineering and Technology and a Chartered Physicist and a Chartered Engineer in the United Kingdom. She has authored or co-authored some 230 scientific and technical papers.

**K. T. V. Grattan** Professor Grattan graduated in Physics from Queens University Belfast with a BSc (First Class Honours) in 1974, followed by a PhD in Laser Physics in the use of laser-probe techniques for measurements on potential new dye laser systems. In 1978 he became a Research Fellow at the Imperial College of Science and Technology, to work on advanced photolytic drivers for novel laser systems. In 1983 he joined City University as a new blood Lecturer in Physics, being appointed Professor of Measurement and Instrumentation and Head of the Department of Electrical, Electronic and Information Engineering in 1991.

His research interests have expanded to include the use of fibre optic and optical systems in the measurement of a range of physical and chemical parameters for industrial applications. He obtained a DSc from City University in 1992 for his work in sensor systems was President of the Institute of Measurement and Control during the year 2000. He was awarded the Callendar Medal and the Honeywell Prize of the Institute of Measurement and Control and was Dean of the School of Engineering & Mathematical Sciences and the School of Informatics at City University from 2008-12. He was appointed Dean of the City Graduate School in 2012.

He was elected a Fellow of the Royal Academy of Engineering in 2008. He is the author of over seven hundred publications in major international journals and conferences and is the co-editor of a five volume topical series on Optical Fibre Sensor Technology.